

3 Hours

Total marks: 80

- Question no. 1 is compulsory
- Attempt any Three questions from remaining

Q1. Answer any 4 questions from the given questions:

20

- If system matrix $A = [-3, 1; -2, 0]$ find the state transition matrix.
- Find the fundamental frequency of the signal

$$x(t) = \cos\left(\frac{10\pi}{3}t\right) + \sin\left(\frac{5\pi}{4}t\right)$$

- Explain the application of Signals and System in Multimedia Processing.
- i. Express the signals shown in Fig 1 in terms of unit step function

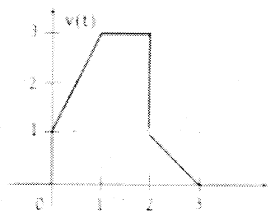


Fig. 1



- ii. Explain Energy and power of a signal.
- Test the given system for linearity, causality, stability, memory and time variant.

$$y(t) = x(t^2)$$

- Explain the application of Signals and System in Multimedia Processing.

Q2. Evaluate $y(t) = x(t) * h(t)$, where $x(t) = u(t) - u(t-3)$ and $h(t) = u(t) - u(t-2)$
 (a) by an analytical technique, and (b) by a graphical method.

20

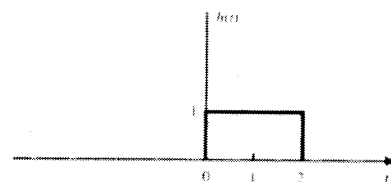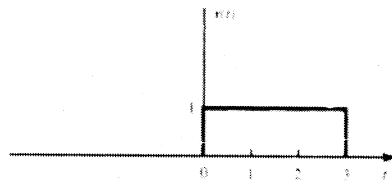

Q3.a. Determine the sequence $x[n]$ associated with Z-Transform using residue method.

10

$$X(z) = \left\{ \frac{(1-e^{-a})z}{(z-1)(z-e^{-a})} \right\}$$

- State and Prove Parseval's Theorem with respect to DTFT.

10

Q4.a. Determine the state model of the system governed by the equation

10

$$y[n] = -2y[n-1] + 3y[n-2] + 0.5y[n-3] + 2x[n] + 1.5x[n-1] + 1.5x[n-2] + 4x[n-3]$$

- Find Fourier series for $f(x) = x^3(-\pi, \pi)$

10

Q5.a Determine DTFS for the sequence $x(n) = \cos^2((\pi/8)n)$ 8

b. Find Laplace transform of $\frac{d}{dt} \sin(t) u(t)$. 8

c. Find Inverse Laplace transform using convolution 4

$$L^{-1} = \left\{ \frac{s^2}{(s^2 + a^2)(s^2 + b^2)} \right\}$$

Q6. Write short note on any two: 20

- a. Feedforward Control system
- b. ROC in Z-Transform and Laplace Transform
- c. Relation of ESD, PSD with auto-correlation
